





# Garden


105 | 130 | 150










 **IMPIEGO:** Trinciaerba leggero per minitrattori, idonea per prati, giardini, parchi ecc.



 **USE:** Flail mower for mini-tractors. Suitable for greens gardens, parks, etc.

 **EMPLOI:** Broyeur léger convenable pour prés, jardins parcs, etc.

 **ANWENDUNG:** Leichte Maschine für Kleintraktoren geeignet für Wiesen, Garten, Parkanlagen, usw.

 **UTILIZACION:** Maquina idonea para cesped jardines parques, etc.

MODEL	A cm	B cm	C cm	D cm	E cm	 max Ø 1.5 cm	 max Ø 2.5 cm		 Kg		RPM 540		RPM 1000 (Optional)	
											 HP MAX	 RPM	 HP MAX	 RPM
GARDEN 105	120	30	61	85	108	48	24	2	155	I	25	2975	30	2900
GARDEN 130	144	30	61	85	132	64	32	3	180	I	25	2975	30	2900
GARDEN 150	166	30	61	85	155	80	40	3	200	I	25	2975	30	2900

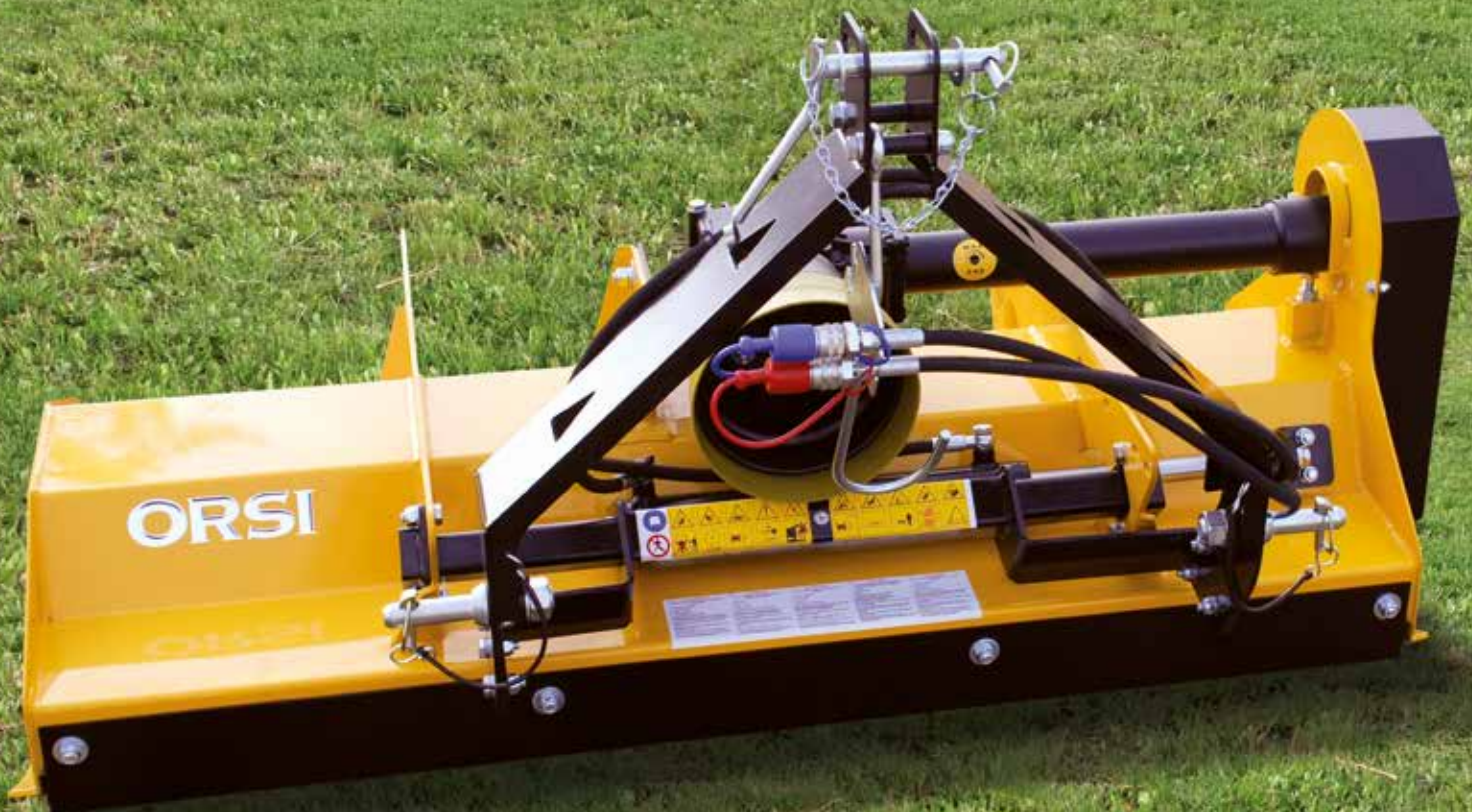






- VELOCITÀ PERIFERICA DEGLI UTENSILI
- TIP SPEED OF TOOLS
- VITESSE PERIPHERIQUE DES OUTILS
- WERKZEUGUMFANGSGESCHWINDIGKEIT
- VELOCIDAD PERIFERICA DE HERRAMIENTAS

	RPM 540	RPM 1000
MODEL	m/sec	m/sec
GARDEN 105-130	41.25	40.21
GARDEN 150	42.19	41.12



MODEL	A mm	B mm
GARDEN 105-130	89 x 8	265
GARDEN 150	95 x 10	271

## EQUIPAGGIAMENTO DI SERIE    STANDARD EQUIPMENT    DE SÉRIE    STANDARDAUSSTATTUNG    ACESORIOS DE SERIE


■ RULLO D'APPOGGIO Ø 102 mm  
AUTOPULENTE  
RUOTA LIBERA NEL GRUPPO  
ATTACCO AL SOLLEVATORE KG 25  
CATARIFRANGENTI

■ SELF-CLEANING REAR ROLLER  
Ø 102 mm  
FREE WHEEL IN THE GEARBOX  
3 POINT LINKAGE KG 25  
REFLECTORS

■ ROULEAU ARRIÈRE  
AUTONETTOYANT Ø 102 mm  
ROUE LIBRE DANS LE BOITIER  
ATTELAGE 3EME POINT KG 25  
RÉFLECTEURS

■ SELBSTREINIGENDE  
WALZE Ø 102 mm  
FREILAUF IM GETRIEBE  
3-PUNKT ANSCHLUSS KG 25  
REFLEKTOREN

■ RODILLO AUTOLIMPIANTE Ø 102 mm  
RUEDA LIBRE EN LOS ENGRANAJES  
ENGANCHE 3.PUNTO KG 25  
REFLECTORES



## OPTIONAL



■ ROTORE CON MAZZETTE MAX Ø 2,5 CM  
■ ROTOR WITH LIGHT HAMMERS  
■ ROTOR AVEC MARTEAUX LEGERS  
■ ROTORWELLE MIT LEICHTEN HÄMMERN  
■ ROTOR CON MARTILLOS LIGEROS



■ SPOSTAMENTO A SCORRIMENTO MECCANICO  
■ MECHANICAL SIDE SHIFT  
■ DÉPORT MECANIQUE  
■ MECHANISCHE SEITENVERSETZUNG  
■ DESPLAZAMIENTO MECANICO



■ SPOSTAMENTO IDRAULICO  
■ HYDR. SIDE SHIFT  
■ DÉPORT HYDR.  
■ HYDR. SEITENVERSETZUNG  
■ DESPLAZAMIENTO HIDRAULICO



■ SLITTE  
■ SKIDS  
■ PATINS  
■ KUFEN  
■ PATINES



■ CARDANO  
■ PTO SHAFT  
■ CARDAN  
■ GELENKWELLE  
■ CARDAN