



INTER-ROW CULTIVATORS Series SM I.

Available with or without FERTILIZER in the versions 4 6 8 rows, with hydraulic foldable frame for the transport on road.




Floor space during the transport m 2,50



STANDARD EQUIPMENT:

- III point linkage CAT II
- Main frame in tubular 120x80x7 mm.
- Main wheels type 155 R13 5 holes hub (for the version with fertilizer)
- Element with parallelogram equipped with:
 1. N. 5 flex springs 32x12
 2. Adjustable plant proof plates
 3. Iron depth wheels (at demand made by rubber).
 4. Adjustable depth by handle
 5. Traction spring for increasing aggression on the ground

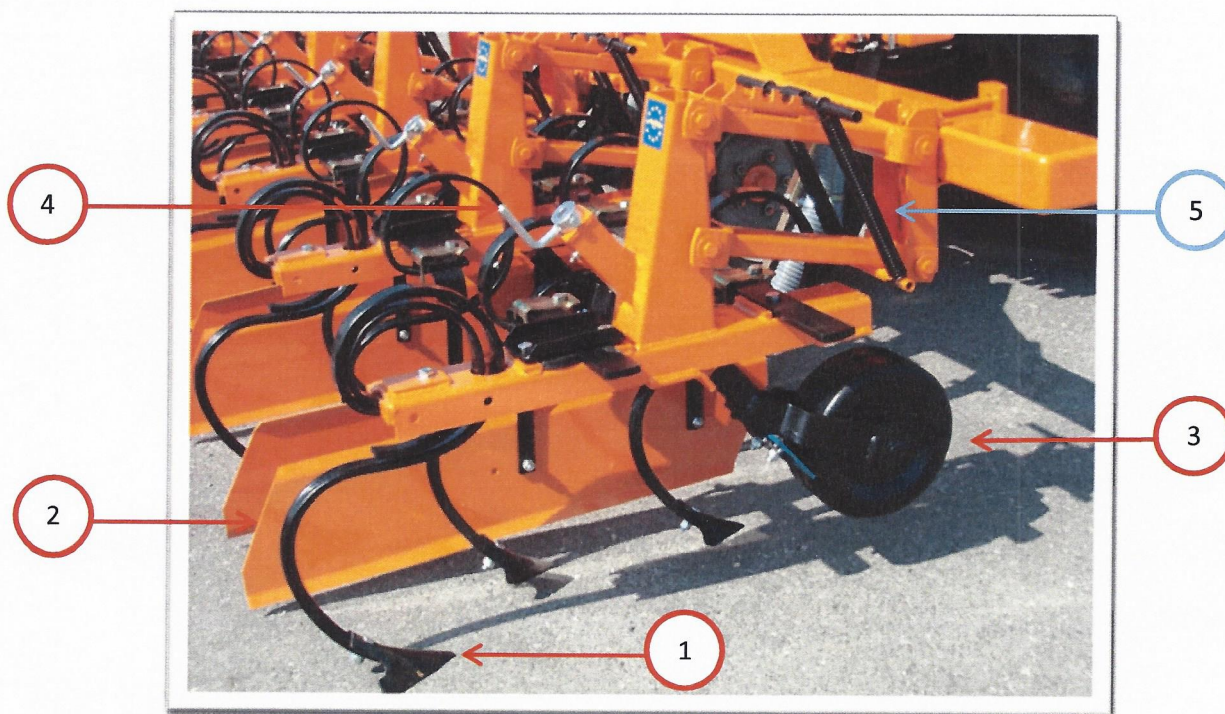



The inter-row cultivators series SMI can be equipped with a pneumatic volumetric FERTILIZER (6 – 8 rows).

Made with painted sheet with, inspection eye and inside grate for filter, cover sheet

Fertilizer hopper 720 liters





VERSIONS AVAILABLE

Maize version with/without volumetric fertilizer. **Hydraulic foldable frame**

Model	Rows N.	Space distance	Elements N.	Fertilizer
SMI 4	4	70/75 cm	5	YES/NO
SMI 6	6	70/75 cm	7	YES/NO
SMI 8	8	70/75 cm	9	YES/NO

Sugar beet/maize version with/without volumetric fertilizer. **Fixed frame**

Model	Rows N.	Space distance	Elements N.	Fertilizer
SM 8	8	70/75 cm	9	YES/NO
SM 12	12	70/75 cm	13	YES/NO
SB 12	12	45 cm	13	YES/NO
SB 18	18	45 cm	19	YES/NO



The first inter row cultivator machine efficient on very hard soil or for corn seeds with direct seeding, born from the different experiences of the company ma/ag, equipped with an element with heavy parallelogram, with double traction spring for increasing the penetration on the soil.

Hydraulic folding for reducing the transport width.

PARALLELOGRAM EQUIPMENT

- N. 2 iron wheels installed on bearings, adjustable working depth, complete with soil scrapers
- N. 1 central disc installed on double bearing and greaser
- N. 1 Central rigid anchor mounted on 2 dolly device springs, reversible iron steel share, couple of flex springs 45x12 mm, working lateral. At demand, it is possible to have lateral save plants plates, adjustable and independent.



Possibility to mount openers with different measures.



Version with fertilizer at demand

Model	Rows N°	Space distance cm	Elements N°	Folding	Transport width m	Weight Kg
SP 4	4	70 / 75	5	Hydraulic	2,50	950
SP 6	6	70 / 75	7	Hydraulic	2,50	1270
SP 8	8	70 / 75	9	Hydraulic	3,00	1730